

PRODUCT FEATURES

- Up to 11.1Gbps Data Links
- Up to 20km transmission on SMF
- Power dissipation<1.5W
- 1270nm DFB laser and PIN receiver
- 1330nm DFB laser and PIN receiver
- 2-wire interface with integrated Digital Diagnostic monitoring
- EEPROM with Serial ID Functionality
- Hot-pluggable SFP+ footprint
- Compliant with SFP+ MSA with LC connector
- Single + 3.3V Power Supply
- Case operating temperature: 0°C ~+70°C

STANDARD

- Compliant with SFF-8472
 - Compliant to SFF-8431
 - Compliant to 802.3ae 10GBASE-LR/LW
 - RoHS Compliant.
-

PRODUCT DESCRIPTION

It is hot pluggable 3.3V Small-Form-Factor transceiver module. It's designed expressly for high-speed communication applications that require rates up to 11.1Gbps, it designed to be compliant with SFF-8472 and SFP+ MSA. The module data link up to 20km in 9/125um single mode fiber.

I Absolute Maximum Ratings

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Note |
|-----------------------------|--------|---------|------|---------|------|------|
| Storage Temperature | Ts | -40 | - | 85 | °C | |
| Storage Ambient Humidity | HA | 5 | - | 95 | % | |
| Operating Relative Humidity | RH | - | - | 85 | % | |
| Power Supply Voltage | VCC | -0.3 | - | 4 | V | |
| Signal Input Voltage | | Vcc-0.3 | - | Vcc+0.3 | V | |

II Recommended Operating Conditions

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Note | |
|----------------------------|--------|-------------------|---------|------|------|------------------|-------------|
| Case Operating Temperature | Tcase | 0 | - | 70 | °C | Without air flow | |
| Power Supply Voltage | VCC | 3.14 | 3.3 | 3.47 | V | | |
| Power Supply Current | ICC | - | | 350 | mA | | |
| Data Rate | BR | | 10.3125 | | Gbps | | |
| Transmission Distance | TD | | - | 10 | km | | |
| Coupled fiber | | Single mode fiber | | | | | 9/125um SMF |

III Optical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Note |
|-----------------------------------|-----------------------------|------|------|-------|------|----------|
| Transmitter | | | | | | |
| Average Launched Power | P_{Out} | -6 | - | -1 | dBm | |
| Average Launched Power(Laser Off) | P_{off} | - | - | -30 | dBm | Note (1) |
| Center Wavelength Range | λ_C | 1260 | 1270 | 1280 | nm | |
| | | 1320 | 1330 | 1340 | nm | |
| Side mode suppression ratio | SMSR | 30 | - | - | dB | |
| Spectrum Bandwidth(-20dB) | σ | - | - | 1 | nm | |
| Extinction Ratio | ER | 3.5 | | - | dB | Note (2) |
| Output Eye Mask | Compliant with IEEE 802.3ae | | | | | Note (2) |
| Receiver | | | | | | |
| Input Optical Wavelength | λ_{IN} | 1320 | 1330 | 1340 | nm | |
| | | 1260 | 1270 | 1280 | nm | |
| Receiver Sensitivity | P_{sen} | - | - | -14.4 | dBm | Note (3) |
| Input Saturation Power (Overload) | P_{SAT} | 0.5 | - | - | dBm | Note (3) |
| LOS -Assert Power | PA | -30 | - | - | dBm | |
| LOS -Deassert Power | PD | - | - | -17 | dBm | |
| LOS -Hysteresis | PHys | 0.5 | - | 5 | dB | |

IV. Electrical Interface Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Note |
|------------------------------------|---------|------|------|---------|-------|------|
| Total power supply current | Icc | - | | 350 | mA | |
| Transmitter | | | | | | |
| Differential Data Input Voltage | VDT | 180 | - | 700 | mVp-p | |
| Differential line input Impedance | RIN | 85 | 100 | 115 | Ohm | |
| Transmitter Fault Output-High | VFaultH | 2.4 | - | Vcc | V | |
| Transmitter Fault Output-Low | VFaultL | -0.3 | - | 0.8 | V | |
| Transmitter Disable Voltage- High | VDisH | 2 | - | Vcc+0.3 | V | |
| Transmitter Disable Voltage- low | VDisL | -0.3 | - | 0.8 | V | |
| Receiver | | | | | | |
| Differential Data Output Voltage | VDR | 300 | - | 850 | mVp-p | |
| Differential line Output Impedance | ROUT | 80 | 100 | 120 | Ohm | |
| Receiver LOS Pull up Resistor | RLOS | 4.7 | - | 10 | KOhm | |
| Data Output Rise/Fall time | tr/tf | | - | 38 | ps | |
| LOS Output Voltage-High | VLOSH | 2 | - | Vcc | V | |
| LOS Output Voltage-Low | VLOSL | -0.3 | - | 0.4 | V | |

V. Pin Description

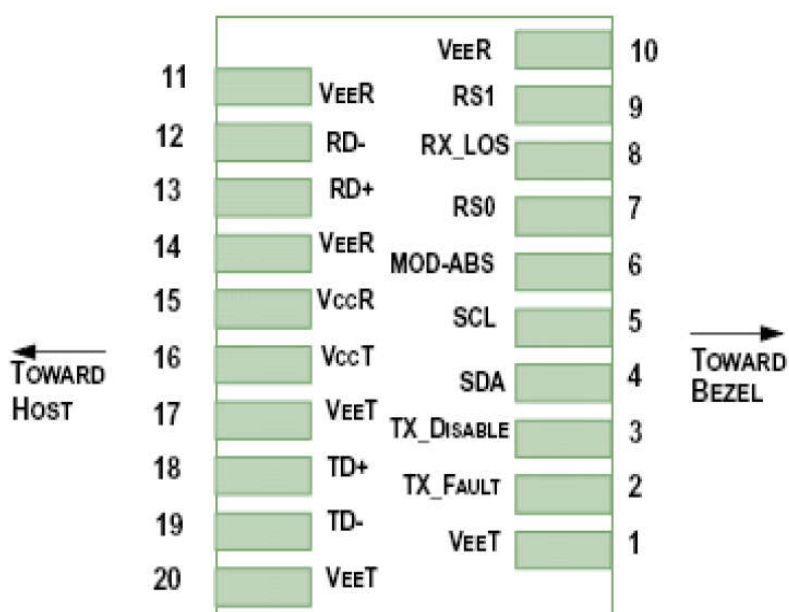



Diagram of Host Board Connector Block Pin Numbers and Name

| Pin | Symbol | Name/Description | NOTE |
|-----|--------------------|--|------|
| 1 | V _{EET} | Transmitter Ground (Common with Receiver Ground) | 1 |
| 2 | T _{FAULT} | Transmitter Fault. | 2 |
| 3 | T _{DIS} | Transmitter Disable. Laser output disabled on high or open. | 3 |
| 4 | SDA | 2-wire Serial Interface Data Line | 4 |
| 5 | SCL | 2-wire Serial Interface Clock Line | 4 |
| 6 | MOD_ABS | Module Absent. Grounded within the module | 4 |
| 7 | RS0 | Rate Select 0 | 5 |
| 8 | LOS | Loss of Signal indication. Logic 0 indicates normal operation. | 6 |
| 9 | RS1 | No connection required | 1 |
| 10 | V _{EER} | Receiver Ground (Common with Transmitter Ground) | 1 |
| 11 | V _{EER} | Receiver Ground (Common with Transmitter Ground) | 1 |
| 12 | RD- | Receiver Inverted DATA out. AC Coupled | |
| 13 | RD+ | Receiver Non-inverted DATA out. AC Coupled | |
| 14 | V _{EER} | Receiver Ground (Common with Transmitter Ground) | 1 |
| 15 | V _{CCR} | Receiver Power Supply | |
| 16 | V _{CCT} | Transmitter Power Supply | |
| 17 | V _{EET} | Transmitter Ground (Common with Receiver Ground) | 1 |
| 18 | TD+ | Transmitter Non-Inverted DATA in. AC Coupled. | |
| 19 | TD- | Transmitter Inverted DATA in. AC Coupled. | |
| 20 | V _{EET} | Transmitter Ground (Common with Receiver Ground) | 1 |

Notes:

1. Circuit ground is internally isolated from chassis ground.
2. T_{FAULT} is an open collector/drain output, which should be pulled up with a 4.7k – 10k Ohms resistor on the host board if intended for use. Pull up voltage should be between 2.0V to Vcc + 0.3V. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
3. Laser output disabled on T_{DIS} >2.0V or open, enabled on T_{DIS} <0.8V.
4. Should be pulled up with 4.7kΩ- 10kΩ host board to a voltage between 2.0V and 3.6V. MOD_ABS pulls line low to indicate module is plugged in.
5. Internally pulled down per SFF-8431 Rev 4.1.
6. LOS is open collector output. It should be pulled up with 4.7kΩ – 10kΩ on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

VI. Outline Dimensions

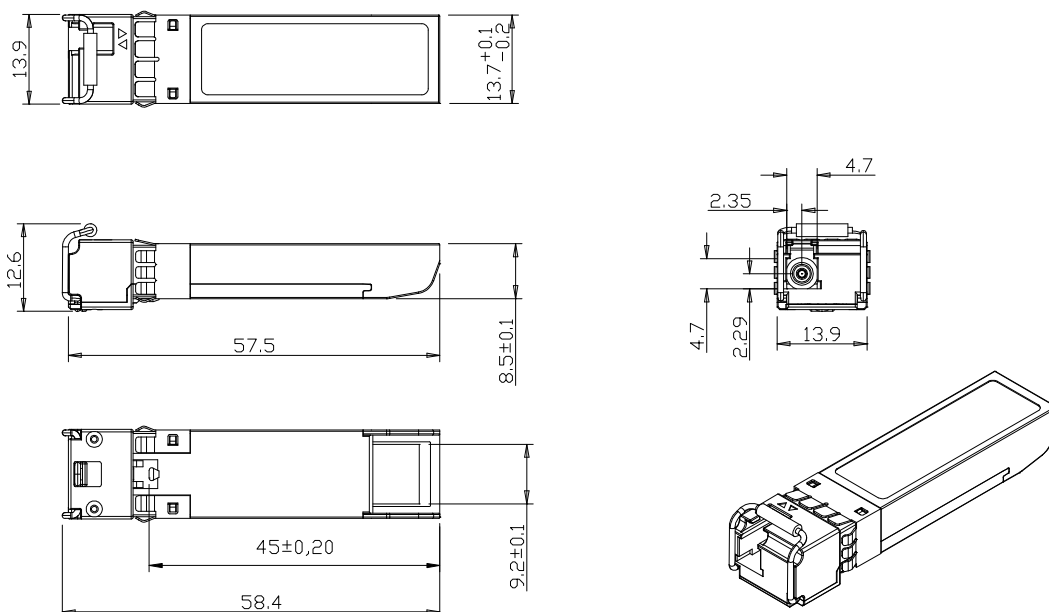

VII. Ordering information :

| | | |
|-------------------|------------------|--------|
| SFP-10G-2733-20KM | TX-1270, RX-1330 | 0~70°C |
| SFP-10G-3327-20KM | TX-1330, RX-1270 | 0~70°C |